

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl

klemko®


860190.jpg

Led Driver Constante Spanning

Package type: CT á 1 pce

PRODUCT SPECIFICATIONS:

| | |
|---|---------------|
| Model | Static |
| Output power (W) | 120 - 400 |
| Housing | Metal housing |
| Suitable for constant voltage | Yes |
| Output voltage (V) | 24 - 24 |
| Input voltage (V) | 176 - 264 |
| Suitable for DC-voltage (primary side) | Yes |
| Suitable for constant current | No |
| Degree of protection (IP) | IP67 |
| Protection class | I |
| Suitable for outdoor use | Yes |
| Length (mm) | 400 |
| Width (mm) | 60 |
| Height (mm) | 22 |
| Rated frequency (Hz) | 50 - 60 |
| 0.95 | |
| Ambient temperature (°C) | -20 - +50 |
| Aluminium | |
| Yes | |
| Number of channels | 1 |
| Frequency input voltage (Hz) | 50 - 60 |
| Independently operating | Yes |
| Yes | |
| Overload protection | Yes |
| Yes | |
| Overtemperature protection | Yes |
| Yes | |
| Short-circuit protected | Yes |
| No | |
| Efficiency (%) | 93 |
| (kV) | 6 |
| (kV) | 4 |
| None | |
| Max. number of luminaires per miniature circuit breaker B16 | 4 |
| Max. number of luminaires per miniature circuit breaker C16 | 5 |
| Dimmable | No |
| PWM modulation | No |
| Operation by Bluetooth | No |
| Dimming DALI-2 | No |
| IFTTT support available | No |

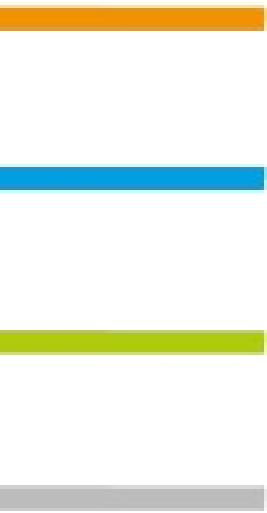

| | |
|---|----|
| Compatible with Google Assistant | No |
| Compatible with Amazon Alexa | No |
| Compatible with Casambi | No |
| Dimming potentiometer (integrated) | No |
| No | |
| Compatible with Apple HomeKit | No |
| Dimming RF | No |
| Dimming manufacturer's proprietary system | No |
| Dimming 1-10 V | No |
| Dimming LineSwitch | No |
| Dimming phase cut-on | No |
| Dimming DALI | No |
| Dimming programmable | No |
| Dimming Sine Wave Reduction | No |
| Dimming DMX | No |
| Dimming mains voltage modulation | No |
| Constant light output (CLO) | No |
| Dimming Touch and Dim | No |
| Dimming DSI | No |
| Dimming Zigbee | No |
| Dimming phase cut-off | No |
| Dimming 0-10 V | No |
| Dimming with push-button | No |