

Klemko Techniek B.V.  
Phone: +31 (0)880023300  
E-mail: info@klemko.nl


# klemko®

## 100165 - A 1525 PSK

Geïsoleerde kabelschoenen, PVC

Package type: BX á 100 pce

/productimages/100165.jpg

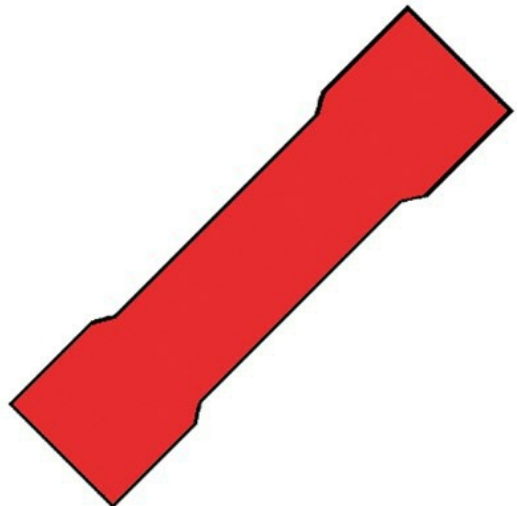

**PRODUCT SPECIFICATIONS:**

|                                            |                          |
|--------------------------------------------|--------------------------|
| Nominal cross section (mm <sup>2</sup> )   | 0.34 - 1.65              |
| Min. AWG-size                              | 22                       |
| Max. AWG-size                              | 16                       |
| Model                                      | UL model                 |
| Sleeve form                                | Short                    |
| Suitable for solid conductors              | Yes                      |
| Suitable for stranded conductors           | Yes                      |
| Suitable for fine strand conductors        | Yes                      |
| Suitable for high temperatures (to 650 °C) | No                       |
| Suitable for insulated varnish             | No                       |
| Suitable for round conductors              | Yes                      |
| Suitable for flat conductors               | No                       |
| Material                                   | Copper                   |
| Surface protection                         | Tinned                   |
| Insulation                                 | Polyvinyl chloride (PVC) |
| Colour insulation                          | Red                      |
| Voltage level                              | Up to 600 V              |
| Type of connection                         | Parallel connector       |
| For pull protected connections             | No                       |
| Oil stop/centre bar                        | No                       |
| Nominal current (A)                        | 18                       |
| No                                         |                          |
| Max. temperature (°C)                      | 105                      |
| (mm)                                       | 13                       |
| (mm)                                       | 4                        |
| (mm)                                       | 1.7                      |
| No                                         |                          |
| No                                         |                          |