

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl


klemko®

156605 - SP 1540 GSL-NY

Geïsoleerde kabelschoenen, Nylon

Package type: BX á 100 pce

/productimages/156605.jpg

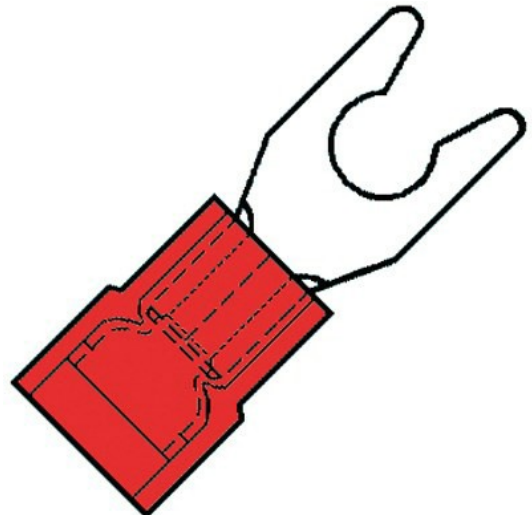

PRODUCT SPECIFICATIONS:

| | |
|--|----------------|
| Bolt dimension (metric) | 4 |
| Flange shape | Fork shape |
| Insulation | Polyamide (PA) |
| Insulated | Yes |
| Colour insulation | Red |
| Nominal cross section (mm ²) | 0.34 - 1.65 |
| PA | |
| Reel/roll packaging | No |
| Sleeve form | Short |
| Colour | Red |
| Suitable for solid conductors | No |
| Suitable for stranded conductors | Yes |
| Suitable for fine strand conductors | Yes |
| Suitable for high temperatures (to 650 °C) | No |
| Suitable for insulated varnish | No |
| Suitable for round conductors | Yes |
| Suitable for flat conductors | No |
| Temperature protected till (°C) | 105 |
| For pull protected connections | Yes |
| Material | Copper |
| Surface protection | Tinned |
| Max. current (I _{max}) (A) | 19 |
| Stud size (imperial) | Other |
| Halogen free | Yes |
| Total length (mm) | 21.2 |
| (mm) | 3.4 |
| (mm) | 7.2 |
| (mm) | 21.2 |
| Amperage (A) | 19 |
| (V) | 600 |
| Watertight | No |
| Yes | |
| Yes | |
| No | |