

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl

klemko®

/productimages/860050.jpg

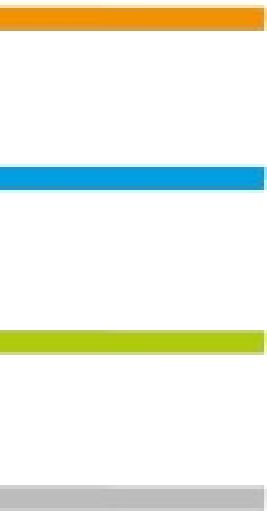
Leddriver constante stroom

Package type: CT á 1 pce



PRODUCT SPECIFICATIONS:

Model	Dynamic
Output power (W)	3 - 6.3
Housing	Plastic housing
Suitable for constant voltage	No
Output voltage (V)	4.3 - 9
Input voltage (V)	100 - 240
Suitable for DC-voltage (primary side)	No
Suitable for constant current	Yes
Output current (mA)	700 - 700
No	
Degree of protection (IP)	IP20
Protection class	II
Suitable for outdoor use	No
Length (mm)	55.6
Width (mm)	38.5
Height (mm)	21.8
(V)	4.3 - 9
Rated frequency (Hz)	50 - 60
0.9	
Max. starting current (A)	4.5
Ambient temperature (°C)	-20 - +5
White	
No	
Number of channels	1
2 - 2	
Frequency input voltage (Hz)	50 - 60
Independently operating	Yes
Yes	
Overload protection	Yes
Yes	
Overtemperature protection	Yes
Yes	
Yes	
No	
None	
Operation by Bluetooth	No
Dimming DALI-2	No
Compatible with Casambi	No
Dimming potentiometer (integrated)	No
Suitable for pulse button	No
Dimming 1-10 V	No
Dimming phase cut-on	No

On the left side of the page, there are five horizontal bars of different colors: orange, blue, light green, lime green, and grey, stacked vertically.

Dimming DALI	No
Dimming DMX	No
Constant light output (CLO)	No
Dimming Touch and Dim	No
Dimming DSI	No
Dimming Zigbee	No
Dimming phase cut-off	No
Dimming 0-10 V	No
Dimming with push-button	No