

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl

klemko®

/productimages/860052.jpg

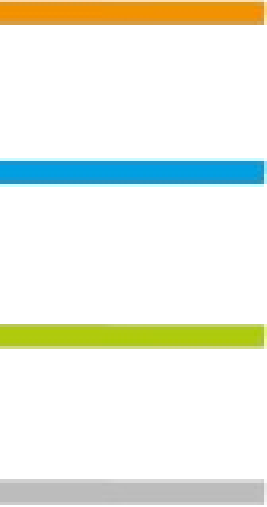
Leddriver constante stroom

Package type: CT á 1 pce



PRODUCT SPECIFICATIONS:

| | |
|----------------------------------------|-----------------|
| Protocol | Phase cut-off |
| Model | Static |
| Output power (W) | 6 - 9 |
| Housing | Plastic housing |
| Suitable for constant voltage | No |
| Output voltage (V) | 8.6 - 12.9 |
| Input voltage (V) | 220 - 240 |
| Suitable for DC-voltage (primary side) | No |
| Suitable for constant current | Yes |
| Output current (mA) | 700 - 700 |
| No | |
| Degree of protection (IP) | IP20 |
| Protection class | II |
| Suitable for outdoor use | No |
| Length (mm) | 85 |
| Width (mm) | 40.4 |
| Height (mm) | 22 |
| Rated frequency (Hz) | 50 - 60 |
| 0.9 | |
| Ambient temperature (°C) | -25 - +50 |
| (%) | 5 |
| White | |
| No | |
| Number of channels | 1 |
| 3 - 4 | |
| 1 - 1 | |
| Frequency input voltage (Hz) | 50 - 60 |
| Independently operating | Yes |
| Yes | |
| Overload protection | Yes |
| Yes | |
| Overtemperature protection | Yes |
| Yes | |
| Yes | |
| No | |
| None | |
| Dimmable | Yes |
| Operation by Bluetooth | No |
| Dimming DALI-2 | No |
| Dimming potentiometer (integrated) | No |
| Suitable for pulse button | No |
| Dimming 1-10 V | No |

On the left side of the page, there are five horizontal bars of different colors: orange, blue, light green, lime green, and grey, stacked vertically.

| | |
|-----------------------------|----------|
| Dimming phase cut-on | No |
| Dimming DALI | No |
| (%) | 10 - 100 |
| Dimming DMX | No |
| Constant light output (CLO) | No |
| Dimming Touch and Dim | No |
| Dimming DSI | No |
| Dimming Zigbee | No |
| Dimming phase cut-off | Yes |
| Dimming 0-10 V | No |