

Klemko Techniek B.V.  
Phone: +31 (0)880023300  
E-mail: info@klemko.nl

# klemko®

/productimages/860162.jpg


**Led Driver Constante Spanning**

Package type: CT á 1 pce



**PRODUCT SPECIFICATIONS:**

Model	Static
Output power (W)	30 - 100
Housing	Metal housing
Suitable for constant voltage	Yes
Output voltage (V)	24 - 24
Input voltage (V)	176 - 264
Suitable for DC-voltage (primary side)	Yes
Suitable for constant current	No
Degree of protection (IP)	IP67
Suitable for outdoor use	Yes
Length (mm)	305
Width (mm)	30
Height (mm)	21
Rated frequency (Hz)	50 - 60
0.92	
Ambient temperature (°C)	-20 - +50
Aluminium	
Yes	
Number of channels	1
Frequency input voltage (Hz)	50 - 60
Independently operating	Yes
Yes	
Overload protection	Yes
Overtemperature protection	Yes
Yes	
Short-circuit protected	Yes
No	
Efficiency (%)	92
(kV)	6
(kV)	4
None	
Max. number of luminaires per miniature circuit breaker B16	10
Max. number of luminaires per miniature circuit breaker C16	16
Dimmable	No
PWM modulation	No
Operation by Bluetooth	No
Dimming DALI-2	No
IFTTT support available	No
Compatible with Google Assistant	No
Compatible with Amazon Alexa	No

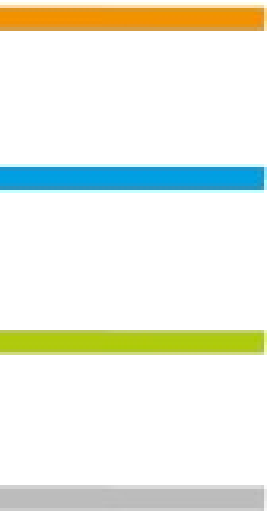

Compatible with Casambi	No
Dimming potentiometer (integrated)	No
No	
Compatible with Apple HomeKit	No
Dimming RF	No
Dimming manufacturer's proprietary system	No
Dimming 1-10 V	No
Dimming LineSwitch	No
Dimming phase cut-on	No
Dimming DALI	No
Dimming programmable	No
Dimming Sine Wave Reduction	No
Dimming DMX	No
Dimming mains voltage modulation	No
Constant light output (CLO)	No
Dimming Touch and Dim	No
Dimming DSI	No
Dimming Zigbee	No
Dimming phase cut-off	No
Dimming 0-10 V	No
Dimming with push-button	No