

Klemko Techniek B.V.  
Phone: +31 (0)880023300  
E-mail: info@klemko.nl

# klemko®

## 863150 - IA-LAU60 x 60NW

LED inlegarmaturen


Package type: CT á 1 pce

/productimages/863150.jpg



**PRODUCT SPECIFICATIONS:**

Colour of light	White
Suitable for suspended mounting	No
Suitable for ceiling mounting	Yes
Suitable for wall mounting	No
Suitable for built-in mounting	Yes
Suitable for surface mounting	No
Lamp type	LED not exchangeable
With light source	Yes
Type of control gear	LED operating device current-controlled
With control gear	No
Suitable for emergency lighting	Yes
Nominal voltage (V)	48 - 48
Nominal current (mA)	0 - 700
Colour temperature (K)	4000 - 4000
Housing material	Aluminium
Housing colour	White
Suitable for light line configuration	No
Material cover	Other
Suitable for workplace according to EN 12464-1	Yes
Type of grid	Matt
Light sharing	Symmetric
Beam angle	Extreme wide beam >80°
Light outlet	Indirect
Length (mm)	595
Width (mm)	595
Height/depth (mm)	120
Built-in length (mm)	595
Built-in width (mm)	595
Built-in height/depth (mm)	120
With movement sensor	No
With light sensor	No
Max. system power (W)	31
Voltage type	DC
Colour rendering index CRI	80-89
Dimming potentiometer (integrated)	No
Light distributor	Reflector
Colour consistency (McAdam ellipse)	SDCM3
Suitable for lamp power (W)	31 - 31
Number of poles	2
Connection type	Cable
Unified Glare Ratio (UGR)	16
Exchangeable control gear	Yes
Lumen maintenance at median useful life	70

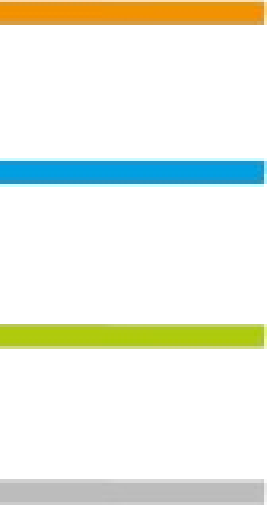

of 50,000 h at 25 °C ambient (tq) (%)	
Colour of light adjustable	No
Luminous flux adjustable	Continuously variable
Beam angle adjustable	No
Energy efficiency class of the light source according to EU regulation 2019/2015	D
Dimmable	Yes
(lm/W)	0 - 4250
(lm)	0 - 4250
With presence indicator	No
IP20	
Degree of protection (IP), front side	IP20
None	
Suitable for clamp-mounting	No
With switch	No