



**871563**  
**AWD BUS24V01-10V**

**SPECIFICATIONS**

|                          |                           |
|--------------------------|---------------------------|
| Connection voltage       | 15-28V DC                 |
| Output signal            | 10mA (active and passive) |
| Power consumption        | 48mW (at 24V)             |
| Max. installation height | 5m                        |
| Detection area           | Ø6.66m (at 3m height)     |
| Detection                | Movement + Brightness     |
| Expand with              | Max. 5 slaves             |
| Ambient temperature      | 0 - 50°C                  |
| IP-Rate                  | IP41                      |
| Standards                | CE                        |




- 24V** Supply voltage (15-28VDC)
- GND** Ground/ GND
- BM** Motion (no movement = 0V max 10mA active/ passive)

**1-10V** Brightness (0V = ca 0 Lux, 10V = ca 1.000 Lux, max 10mA)


**Slave+** Slave sensor coupling

**Slave-** Slave sensor coupling


Ensure at all times that you connect the existing contacts to the correct screw terminal! **If in doubt, measure first!**

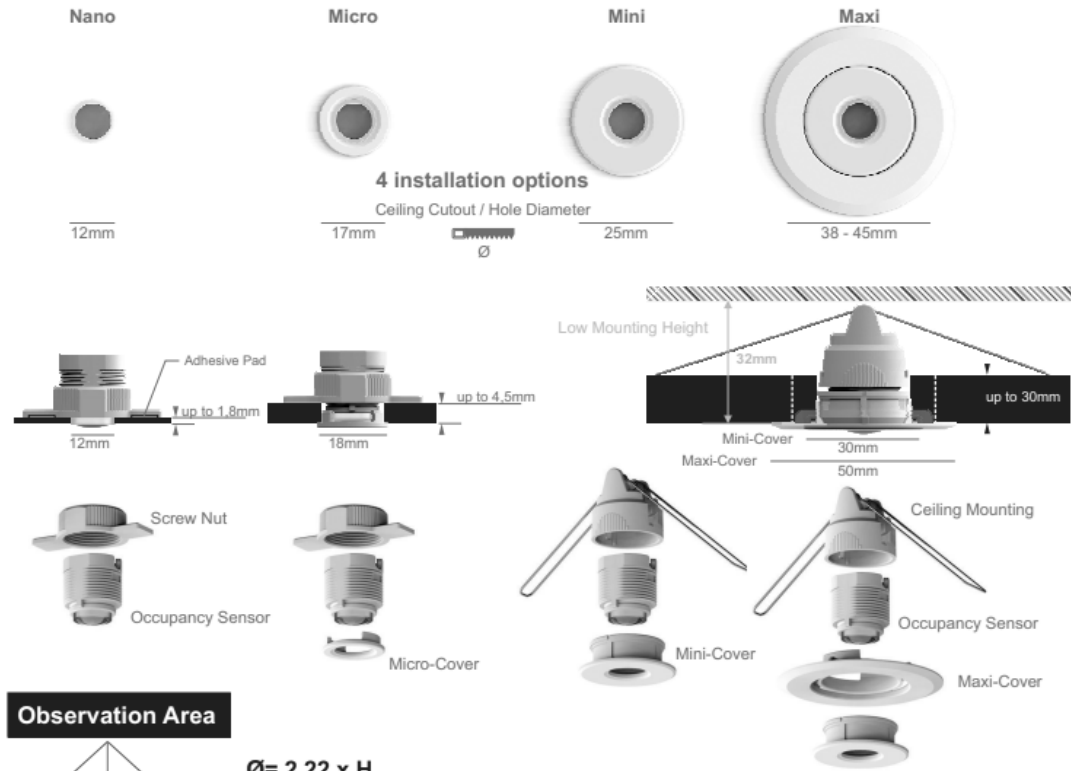

**Observation Area**

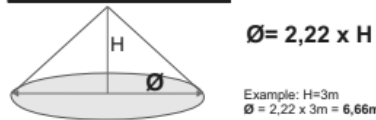

**Installation**

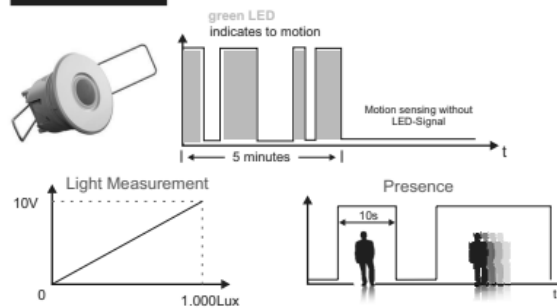

**Observation Area Extension**

